

# PVC ANTI SLIP TAPE

## KEY FEATURES

- Mineral-coated, high-friction anti-slippery surface.
- Its low profile design helps to reduce the risk of tripping on.
- Good resistance to UV rays and chemicals.
- Easy to install due to its greater flexibility performance in cold weather environments.
- Excellent level of adhesion on most surfaces.
- Leaves no residue and does not damage surfaces when removing the tape.




Anti-Slip Tape, composed by a sanded PVC film support on top of its surface with a rough finish, covered by a solvent acrylic adhesive on its back part and being protected by a siliconized PE liner.

It is mainly used to prevent accidents and falls on smooth and slippery surfaces. It is indicated for humidified floors, ramps and stairs.

Available colors:



## PRODUCT COMPOSITION



**CARRIER**  
Sanded PVC

**ADHESIVE TYPE**  
Solvent acrylic

**LINER**  
PE Silicone paper

## TECHNICAL CHARACTERISTICS

ADHESIVE PROPERTIES	VALUES	METHOD
Total thickness	0,75 mm	ASTM D-3652
GRIT level friction	80	-
Tensile strenght	≥ 40 N/25 mm	ASTM D-3759
Elongation at break	≥ 30 %	ASTM D-3759
Adhesion to steel	≥ 8 N/25 mm	ASTM D-3330
Holding strenght	≥ 18 h	ASTM D-3654
Temperature application range	[+10° C -+ 40° C]	INTERNAL
Temperature service range	[-20° C -+ 120° C]	INTERNAL

The given values are typical values obtained in specific conditions of temperature, loads and adhesive surface determined by norm. The user must determine if the tape is suitable for their specific application by testing the product. In case help is needed, ATyT will provide you with professional customer support and recommendation, indicating which tape suits best your needs.






## APPLICATIONS

- Used on floors, stairs, ramps or other industrial surfaces.
- Specific meaning related to its use depending on color:
  - **White / Black / Gray** = Marking for general purposes.
  - **Yellow / Yellow-Black** = Caution / Risk.
  - **Blue** = Mandatory / Protection.
  - **Red** = Danger / Prohibition.
  - **Red-White** = Marking of emergency and health care zones.
  - **Green** = Information / Signaling.
  - **Orange / Brown** = Signaling of telecommunications lines, cables, television, etc.
- Suitable for its use on indoor and protected outdoor environments requiring a secure grip.
- Ideal protection to avoid slipping and work accidents.
- Can be applied to concrete, tile, stainless steel, wood, carpet, fabric and much more.



Surfaces to which tape is applied should be clean, dry and free of grease, oil, moisture, dirt and other contaminants. Sufficient pressure should be applied during application. If not, it will affect the properties and appearance of the product.

## STANDARD PRESENTATION:

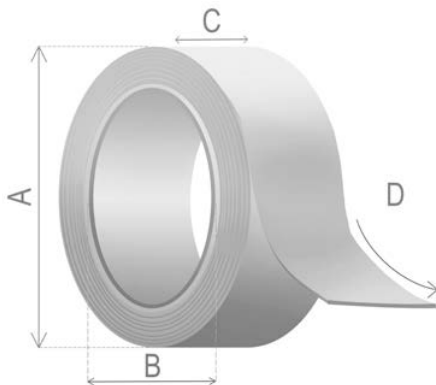

Outer diameter (A)	92 mm	107 mm	115 mm
Core diameter (B)	38 mm		76 mm
Width (C)	25 mm	50 mm	100 mm
Length (D)	5 m	15 m	18 m

Any other length and width available on request. Check conditions. The product can be supplied with a multitude of different types of presentation (see conditions). Among others, we highlight: the personalization of the core, the customized plastic packaging, the shrink wrapping and the labeling of the tape.



## STORAGE CONDITIONS

For better conservation of properties, product should be stored in its original packaging, between 20 and 30° C, preserved from direct exposure to sun and moisture. It is recommended to use the product within 12 months, since dispatching date.



## GENERAL WARRANTY CONDITIONS

ATyT recommends applying the product only on clean, dry and free of grease, oil or other contaminants surfaces.

Product properties are typical and should not be considered specifications. They are based on tests believed to be reliable and performed conformance with recommended test methods. Values are expected to be used for comparison purposes only; they do not represent a manufacturer guarantee. Before using, the client should determine whether the product is fit for a particular purpose and for the user's method of application.

