

# PREMIUM FLEXIBLE MASKING TAPE

## KEY FEATURES

- Excellent level of adhesion on all types of surfaces.
- Easy application on curved profiles and uneven surfaces.
- Easy to remove the tape.
- Does not leave traces of adhesive mass when removed.
- Does not damage the surface on which it is applied.
- Compatible with solvent-based paints and most water-based paints.
- Works best at constant temperatures and is recommended for indoor applications.
- **The product is ecological and has the FSC® certificate.**



**Self-adhesive Ecological tape** composed of a rough crepe paper backing covered by a rubber adhesive.

The tape has been specially designed to be used on **masking jobs** that require a high level of efficiency on **curved, bended and round surfaces** on interior surfaces holding reliably even on rough surfaces, thus avoiding ugly paint tears.

Available colors:



## PRODUCT COMPOSITION



### CARRIER

Rough crepe paper

### ADHESIVE TYPE

Rubber

## TECHNICAL CHARACTERISTICS

ADHESIVE PROPERTIES	VALUES	METHOD
Adhesive weight	115 g/m <sup>2</sup>	ISO 536
Total thickness	280 µm	INTERNAL
Tensile strength	22 N/cm	ASTM D-3759
Elongation at break	27 %	ASTM D-3759
Adhesion to steel	0,8 N/cm	ASTM D-3330
Adhesion to steel (stretched)	4,1 N/cm	ASTM D-3330
Maximum temperature service	35 °C	INTERNAL (cycles of 1h)

The given values are typical values obtained in specific conditions of temperature, loads and adhesive surface determined by norm. The user must determine if the tape is suitable for their specific application by testing the product. In case help is needed, ATyT will provide you with professional customer support and recommendation, indicating which tape suits best your needs.




## APPLICATIONS

- Masking applications in decoration and painting works.
- Uses in the automotive and decoration sectors.
- Particularly suitable for masking curved and irregular sections.
- Sealing of industrial paper bags.
- Saves you corrections that are time-consuming.



Surfaces to which tape is applied should be clean, dry and free of grease, oil, moisture, dirt and other contaminants. Sufficient pressure should be applied during application. If not, it will affect the properties and appearance of the product.

## STANDARD PRESENTATION:

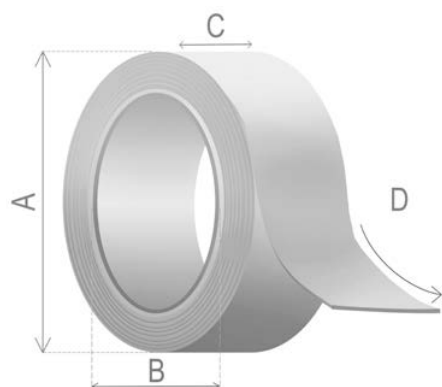

Outer diameter (A)	126 mm		158 mm		198 mm	
Core diameter (B)	76 mm					
Width (C)	15 mm	19 mm	25 mm	38 mm	50 mm	
Length (D)	25 m		50 m		90 m	

Any other length and width available on request. Check conditions. The product can be supplied with a multitude of different types of presentation (see conditions). Among others, we highlight: the personalization of the core, the customized plastic packaging, the shrink wrapping and the labeling of the tape.



## STORAGE CONDITIONS

For better conservation of properties, product should be stored in its original packaging, between 20 and 30° C, preserved from direct exposure to sun and moisture. It is recommended to use the product within 12 months, since dispatching date.



## GENERAL WARRANTY CONDITIONS

ATyT recommends applying the product only on clean, dry and free of grease, oil or other contaminants surfaces.

Product properties are typical and should not be considered specifications. They are based on tests believed to be reliable and performed conformance with recommended test methods. Values are expected to be used for comparison purposes only; they do not represent a manufacturer guarantee. Before using, the client should determine whether the product is fit for a particular purpose and for the user's method of application.

