

# WASHI TAPE 100°C

## KEY FEATURES:

- Does not leave any adhesive residue in its removal.
- Maximum service temperature , up to 100°C.
- Highly conformable adapting to a wide variety of different forms and surfaces.
- Designed with a thin, flexible backing for consistently sharp paint edges on both curved and straight paint lines.
- Easy to tear by hand, with additives incorporated into the backing to prevent paint flaking.
- Resistant to extended exposure of UV rays.



Tape composed by a smooth Washi paper backing (Japanese rice paper) coated with water-based acrylic adhesive.

Suitable for painting masking in-house decoration site and automobile maintenance applications.

Available colors:



## PRODUCT COMPOSITION



**CARRIER**  
Rice paper

**ADHESIVE TYPE**  
Solvent acrylic

## TECHNICAL CHARACTERISTICS

ADHESIVE PROPERTIES	VALUES	TEST METHOD
Total thickness	95 µm	ASTM D-3652
Tensile strenght	≥ 30 N/cm	ASTM D-3759
Adhesion to steel	≥ 1 N/cm	ASTM D-3330
Resistance to UV rays	3 days	INTERNAL
Maximum service temperature	100° C	INTERNAL (cycles of 1h)

The given values are typical values obtained in specific conditions of temperature, loads and adhesive surface determined by norm. The user must determine if the tape is suitable for their specific application by testing the product. In case help is needed, ATyT will provide you with profesional customer support and recommendation, indicating which tape suits best your needs.






## APPLICATIONS

- Professional paint masking for the automotive and construction sector, with high performance.
- Application in curved and small pieces such as profiles, bumpers, lights and handles.
- Masking of extremely narrow grooves, where other masking tapes are not suitable.
- Suitable for multiple layer paint jobs and for automotive after market.
- Perfect tool for indoor and outdoor refinishing applications.
- Precise delimitation protective tape for body shops. Recommended for small and curved body parts with extremely narrow grooves where other traditional masking tapes cannot perform.



Surfaces to which tape is applied should be clean, dry and free of grease, oil, moisture, dirt and other contaminants. Sufficient pressure should be applied during application. If not, it will affect the properties and appearance of the product.

## STANDARD PRESENTATION:

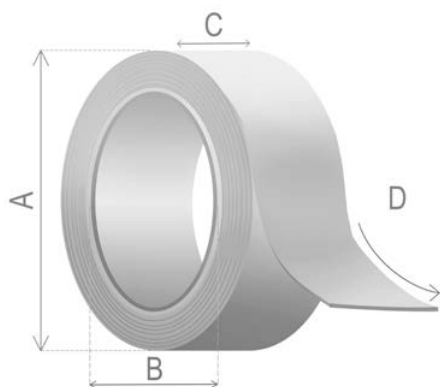

Outer diameter (A)	92mm	104 mm	109 mm	115 mm	137 mm
Core diameter (B)	76 mm				
Width (C)	12 mm	19 mm	25 mm	38 mm	50 mm
Length (D)	10 m	25 m	38 m	50 m	100 m

Any other length and width available on request. Check conditions. The product can be supplied with a multitude of different types of presentation (see conditions). Among others, we highlight: the personalization of the core, the customized plastic packaging, the shrink wrapping and the labeling of the tape.



## STORAGE CONDITIONS

For better conservation of properties, product should be stored in its original packaging, between 20 and 30° C, preserved from direct exposure to sun and moisture. It is recommended to use the product within 12 months, since dispatching date.



## GENERAL WARRANTY CONDITIONS

ATyT recommends applying the product only on clean, dry and free of grease, oil or other contaminants surfaces.

Product properties are typical and should not be considered specifications. They are based on tests believed to be reliable and performed conformance with recommended test methods. Values are expected to be used for comparison purposes only; they do not represent a manufacturer guarantee. Before using, the client should determine whether the product is fit for a particular purpose and for the user's method of application.

