

SKYBLUE MASKING TAPE (UV RESISTANT)

KEY FEATURES

- Create sharp and clean paint lines.
- Quick and easy removal. Leaves no adhesive mass residue.
- Quickly and easily bonds to painted walls, trim, wallpaper, glass, and wood.
- **Resistant to UV rays** and solar radiation with a clean product withdrawal up to 14 days.
- Indoor and outdoor uses.



Masking tape used for painting external surfaces with **high resistance to UV lights and extreme conditions**.

The product, composed by a paper carrier, is covered with solvent acrylic adhesive and has a good level of initial adhesion being **easily removed without leaving traces of adhesive mass** on the surface to which it is applied.

Available colors:



PRODUCT COMPOSITION



CARRIER
Paper

ADHESIVE TYPE
Solvent acrylic

TECHNICAL CHARACTERISTICS

ADHESIVE PROPERTIES	VALUES	TEST METHOD
Total Thickness	120 µm	ASTM D-3652
Tensile strength	≥ 25.9 N/cm	ASTM D-3759
Elongation at break	≥ 6%	ASTM D-3759
Adhesion to steel	≥ 1.4 N/cm	ASTM D-3330
Resistance to UV rays	14 days	INTERNAL
Maximum service temperature	80°C	INTERNAL

The given values are typical values obtained in specific conditions of temperature, loads and adhesive surface determined by norm. The user must determine if the tape is suitable for their specific application by testing the product. In case help is needed, ATyT will provide you with professional customer support and recommendation, indicating which tape suits best your needs.




APPLICATIONS

- Specially designed for **protection in industrial painting**.
- Highly recommended for the **nautical sector** in protection, splicing and multipurpose applications with a high concentration of saltpeter.
- Multipurpose tape, **especially outdoors**.
- Works perfectly on textured and semi-rough surfaces, giving the tape the tack it needs to adhere conveniently to its surface, allowing clean removal from the surface for up to 14 days.



Surfaces to which tape is applied should be clean, dry and free of grease, oil, moisture, dirt and other contaminants. Sufficient pressure should be applied during application. If not, it will affect the properties and appearance of the product.

STANDARD PRESENTATION:

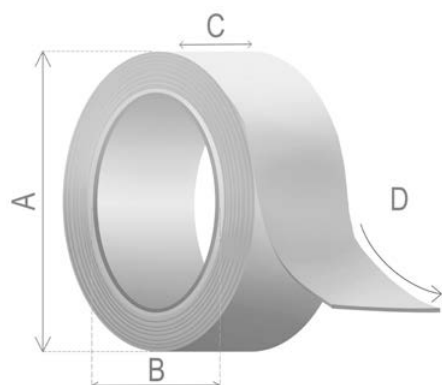

Outer diameter (A)	118 mm		122 mm	
Core diameter (B)	76 mm			
Width (C)	12 mm	25 mm	38 mm	50 mm
Length (D)	45 m		50 m	

Any other length and width available on request. Check conditions. The product can be supplied with a multitude of different types of presentation (see conditions). Among others, we highlight: the personalization of the core, the personalized plastic packaging, the shrink wrapping and the labeling of the tape.



STORAGE CONDITIONS

For better conservation of properties, product should be stored in its original packaging, between 20 and 30° C, preserved from direct exposure to sun and moisture. It is recommended to use the product within 12 months, since dispatching date.



GENERAL WARRANTY CONDITIONS

ATyT recommends applying the product only on clean, dry and free of grease, oil or other contaminants surfaces.

Product properties are typical and should not be considered specifications. They are based on tests believed to be reliable and performed conformance with recommended test methods. Values are expected to be used for comparison purposes only; they do not represent a manufacturer guarantee. Before using, the client should determine whether the product is fit for a particular purpose and for the user's method of application.

