

# PRE-TAPED MASKING FILM

## KEY FEATURES:

- Great adjustability to the surface to which it is applied by electrostatic charge of the film.
- Can be easily torn, allowing a **straight and even cut**.
- **Resists high temperatures** in drying cabins.
- Possibility of being made in **different widths and lengths**.
- For decoration, immediate protection of the surfaces that are not going to be painted.
- Avoids the problem of spraying in vehicle painting.
- Ideal for use in windy conditions—strong adhesion and moisture resistance.



Masking tape, combined with a high-density polyethylene (HDPE) plastic film treated with electrostatic charge for its adjustment to the surface on which it is applied.

The product is available in:

- Different plastic lengths which can be served in 22.5 m and 25 m.
- Different widths of masking tape. It can be produced in 18 mm and 24 mm widths.
- Could be used using masking tape (60, 80, 100, 150 or 160°C), Washi tape (100 or 120°C) or even duct tape.

## PRODUCT COMPOSITION



**TYPE OF TAPE**  
Masking tape

**PLASTIC TYPE**  
HDPE

## TECHNICAL CHARACTERISTICS

ADHESIVE PROPERTIES	VALUES
Inner Ø of core	38 mm
English folding	Half tube totally folded
Plastic density	0.950 g/cm <sup>3</sup>
Plastic total thickness	35 µm
Corona treatment	36-44 dyns

The given values are typical values obtained in specific conditions of temperature, loads and adhesive surface determined by norm. The user must determine if the tape is suitable for their specific application by testing the product. In case help is needed, ATyT will provide you with professional customer support and recommendation, indicating which tape suits best your needs.




## APPLICATIONS

- Specially designed for protection in industrial painting.
- Highly recommended for decoration and automotive sectors.
- General use outdoor paint masker for DIY or professional trades.
- Covers everything to protect frames, baseboards or doors during masking applications.



Surfaces to which tape is applied should be clean, dry and free of grease, oil, moisture, dirt and other contaminants. Sufficient pressure should be applied during application. If not, it will affect the properties and appearance of the product.

## STANDARD PRESENTATION:

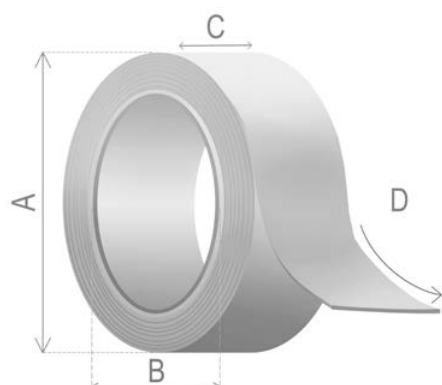

Outer diameter (A)	60 mm				65 mm		
Core diameter (B)	38 mm						
Width (C)	35 cm	60 cm	90 cm	120 cm	180 cm	260 cm	360 cm
Length (D)	22,5 m				25 m		

Any other length and width available on request. Check conditions. The product can be supplied with a multitude of different types of presentation (see conditions). Among others, we highlight: the personalization of the core, the customized plastic packaging, the shrink wrapping and the labeling of the tape.



## STORAGE CONDITIONS

For better conservation of properties, product should be stored in its original packaging, between 20 and 30° C, preserved from direct exposure to sun and moisture. It is recommended to use the product within 12 months, since dispatching date.



## GENERAL WARRANTY CONDITIONS

ATyT recommends applying the product only on clean, dry and free of grease, oil or other contaminants surfaces.

Product properties are typical and should not be considered specifications. They are based on tests believed to be reliable and performed conformance with recommended test methods. Values are expected to be used for comparison purposes only; they do not represent a manufacturer guarantee. Before using, the client should determine whether the product is fit for a particular purpose and for the user's method of application.

