

SELF-ADHESIVE WHITE FLOOR PRO- TECTIVE REUSABLE ROLL (120 g/m²)

KEY FEATURES


- **Reusable.** Allows to cover multiple surfaces on several times.
- **Can be easily removed without leaving any adhesive residue,** regardless of how long it has been installed. You won't have to clean the area after its use.
- **Excellent level of conformability,** being able to be applied even on stairs and / or irregular surfaces.
- Remains smooth on the surface to which it is applied. By having a slightly breathable support, the product prevents the formation of wrinkles over time, contributing to the creation of safe walkable spaces.
- The product does not produce odor on its use and has the ability to be printed.
- Good level of resistance to humidity, punching and tearing stresses.
- Easy to handle and cut.
- **Its installation does not require the use of any type of adhesive tape.**



Protective band composed by a support of non-woven fabric made from 100% white PES (polyethersulfone) fibers laminated on a transparent PE (polyethylene) film and fully coated on its backside with a soft acrylic spray adhesive.

Due to its self-adhesive and non-slip properties, the product is highly recommended for the protection of stairs and all types of floors and surfaces during renovation and painting processes.

In addition, **the product has excellent hermetic properties against the intrusion of water and paint on the application surface and has the capacity of being printable.**

Available colors: 

PRODUCT COMPOSITION

LAMINATED LINER : Transparent PE film


→ Prevents fluids from penetrating the surface.

CARRIER: Non-woven fabric

→ Creates a cushioning effect on surface.

ADHESIVE TYPE: Soft acrylic adhesive spray

→ The non-slip finish keeps the product fixed on the surface and prevents the formation of wrinkles.

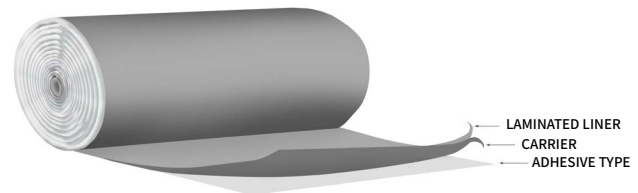

TECHNICAL CHARACTERISTICS

ADHESIVE PROPERTIES	VALUES	METHOD
Total weight	120 g/m ²	ISO 9073-1
Total thickness	2.5 mm	ISO 9073-2
Tensile strength (MD)	≥ 75 N/5 cm	ISO 9073-3
Tensile strength (CD)	≥ 100 N/5 cm	
Elongation at break (MD)	≤ 125 %	ISO 9073-3
Transverse elongation at break (CD)	≤ 150 %	
Skid ability (Load of 15 g/cm ²)	120 N / A4 sample	INTERNAL

The given values are typical values obtained in specific conditions of temperature, loads and adhesive surface determined by norm. The user must determine if the tape is suitable for their specific application by testing the product. In case help is needed, ATYT will provide you with professional customer support and recommendation, indicating which tape suits best your needs.




APPLICATIONS

- **Basic temporary protection for all types of surfaces** during any work process.
- Cushions the impact of falling objects.
- Reform and DIY activities. Especially suitable for the protection of stairs.
- Mechanical and glass replacement workshops, to avoid scratches in the contact areas of professionals.
- Uses on artistic classrooms to prevent any damage caused to the floor.
- Works related with industrial cleaning.



Surfaces to which tape is applied should be clean, dry and free of grease, oil, moisture, dirt and other contaminants. Sufficient pressure should be applied during application. If not, it will affect the properties and appearance of the product.

STANDARD PRESENTATION:

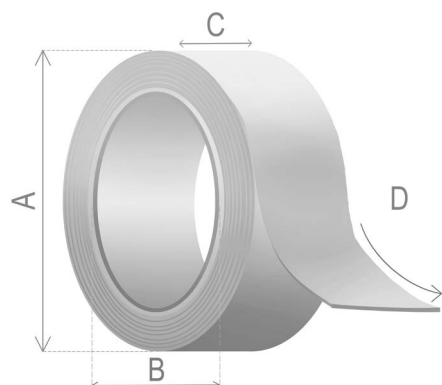

Outer diameter (A)	198 mm	295 mm	408 mm
Core diameter (B)	76 mm		
Width (C)	1000 mm		
Length (D)	10 m	25 m	50 m

Any other length and width available on request. Check conditions.
The product can be supplied with a multitude of different types of presentation (see conditions). Among others, we highlight: the personalization of the core, the personalized plastic packaging, the shrink wrapping and the labeling of the tape.



STORAGE CONDITIONS

For better conservation of properties, product should be stored in its original packaging, between 20 and 30° C, preserved from direct exposure to sun and moisture. It is recommended to use the product within 12 months, since dispatching date.



GENERAL WARRANTY CONDITIONS

ATyT recommends applying the product only on clean, dry and free of grease, oil or other contaminants surfaces.

Product properties are typical and should not be considered specifications. They are based on tests believed to be reliable and performed conformance with recommended test methods. Values are expected to be used for comparison purposes only; they do not represent a manufacturer guarantee. Before using, the client should determine whether the product is fit for a particular purpose and for the user's method of application.

